

Sizewell C Notice to Mariners No 37 of 2026

Issued on behalf of Irish Commercial Charter Boats

EA1N & EA2 Windfarm Pipe Pull Works

Mariners are advised that:

Between October 2nd and October 4th 2026 Pipe Pull work is scheduled on the EA1N and EA2 wind farm export cable pre-installation works off the coast at Thorpeness, just to the south of the Sizewell C Harbour Authority area. This work is complex and will involve several vessels and the Jack-Up-Barge Haven Seachallenger located in position:

Latitude	Longitude
52° 10.976' N	001° 38.639' E

A floating pipeline approximately 1800m in length will be towed into the area by the tug **POLAR FRIGG** with the multicat **OCEAN SUPPLIER** managing the tail of the tow and with two guard vessels in attendance, one to the north and one to the south of the pipeline.

The installation work will focus around the Jack-Up Barge (JUB) and a Pontoon, secured to a four-point mooring approximately 50 metres to seaward of the JUB, but during the initial phase of the pull-in the floating pipe will extend a significant distance from the JUB in an arc extending in a NE to SE direction according to the state of the tide. The below illustration highlights the approximate area and for the safety of all concerned, vessels are requested not to enter this zone.

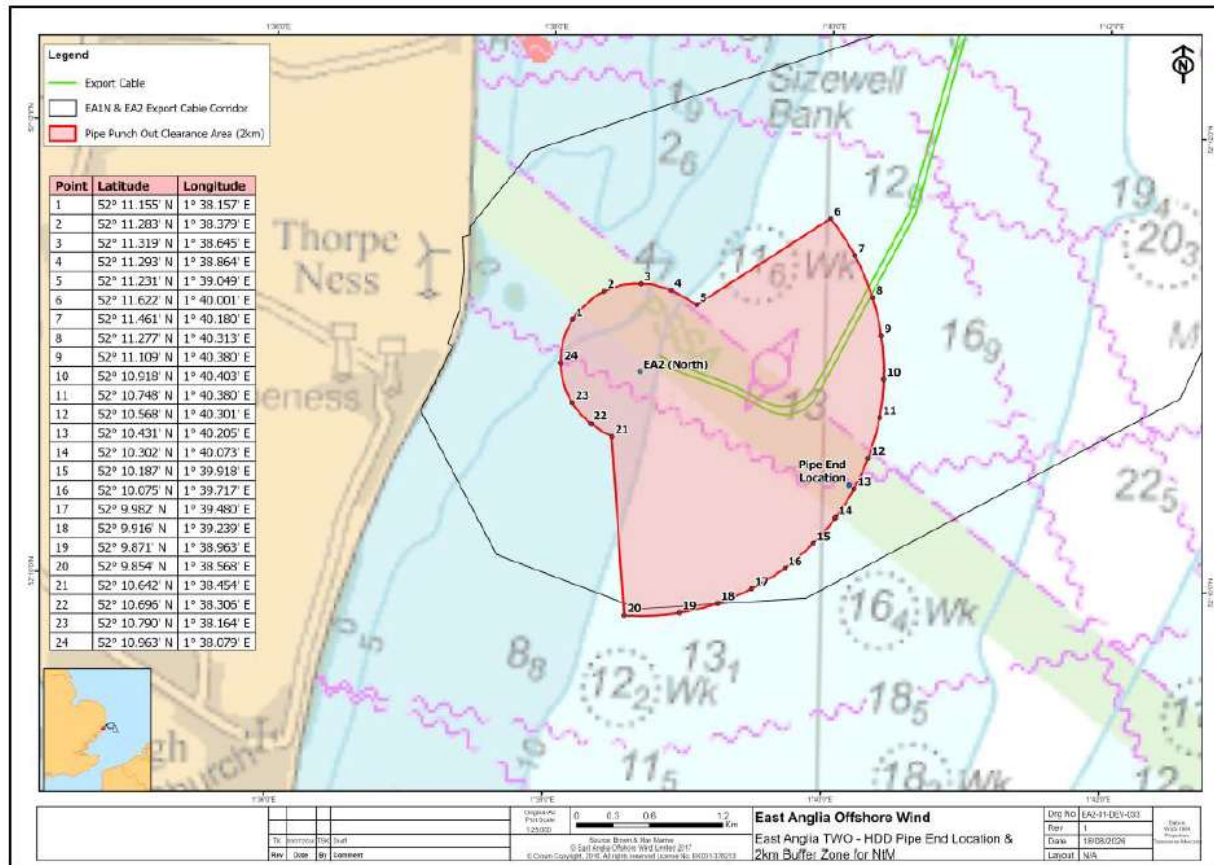


Fig. 1. Exclusion Zone

In addition to the tug **POLAR FRIGG** and the multicat **OCEAN SUPPLIER** the tugs **CT PRENTON** and **HANS**, together with the multicats **PAUL D** and **SOPHIA D** will be assisting with managing the pipe. Mariners are requested to exercise additional vigilance and an effective lookout when approaching the area during this period of increased marine activity.

All vessels engaged in these works will abide by and display all shapes and lights required by the COLREGS.

Vessels will monitor VHF Channels 12 and 16.

	Haven Seachallenger - Accommodation for 25 persons - Max Payload 1000t 50m x 24m x 2.5m 200t crane		Ocean Supplier - Multicat 35t Bollard Pull 26m x 11m
	Polar Frigg - Tug 33.3m x 10m 60t Bollard Pull		Hans - Tug 19.5m x 6.2m 22t Bollard Pull
	Fionn Mac Cumhaill 12 PAX - Bow Loading Platform - Jet-Driven		Cu Chulainn & Cu Roi - Redbay 850 RIB - Bow Loading Platform
	CT Prenton - Shoalbuster Tug 26m x 9.3m 30t Bollard Pull		- Flat top pontoon 30m x 11.4m 4 point mooring
	Sophia D - Multicat 22.4m x 8.0m 15t Bollard Pull		Paul D - Multicat 23.36m x 9.0m 20t Bollard Pull

Tony Lock

Project Manager

Irish Commercial Charter Boats

Date: 26/09/2026

Any further enquiries regarding this Notice to Mariners should be directed to:

Neil Glendinning
SZC Harbour Master

Date: 26/09/2026

Notices to Mariners in Force

No 15 of 2024, No 19 of 2024, No 10 of 2025, No 6 of 2026, No 7 of 2026, No 11 of 2026, No 12 of 2026, No 14 of 2026, No 26 of 2026, No 29 of 2026, No 30 of 2026, No 34 of 2026, No 36 of 2026